Our whole experience for you SBM Mineral Processing

For more than 70 years we at SBM Mineral Processing have been developing and building machines and plants for the stone and earth industry. In addition to stationary plants, we delivered mobile plants to process aggregates for the concrete technology already at an early stage. Today, we are one of the leading manufactu-rers of track-mounted processing plants with **SBM MOBILE CRUSHING & SCREENING SOLUTIONS**.

We are true pioneers in the development of diesel-electric drive systems for all power classes, which we have been building for over 60 years. All our plants are "hybrid electrified" today - thanks to extensive standardisation, they convince in natural stone and recycling operations with their outstanding production performance at low operating costs, maximum availability, and simple and safe operation.

With a qualified, cross-industry dealer and service network in all leading markets of the world, we ensure the sustainable and economic success of our customers.

1950	Foundation of S	вм 1980	First mobile track-mounted crushing plant HYBRID ELECTRIFIED	20	016	New product line "SBM Mobile"
1960 First mobile crushing pla HYBRID ELECTRIFIED			int on wheels	2014		solidation MFL and I Mineral Processing



SBM Mineral Processing GmbH Oberweis 401, 4664 Oberweis, Austria Phone: +43 3612/2703-0 · office@sbm-mp.at www.sbm-mp.at



max. 600 t/h



Texts and illustrations in this brochure may deal with or show additional equipment. All technical information has been carefully prepared but is provided without warranty We reserve the right to change specifications or designs without prior notice.









MAXimise your results!

Mobile mineral processing technology made by SBM - advantages right down the line

SBM is pursuing a simple goal with its track-mobile processing plants: We offer the technically and economically leading solution in every power class.

Efficient full-hybrid drives, best-in-class crushing performance, productive screening and conveying equipment - all packaged in highly mobile plant technology with exemplary ease of operation.

PERFORMANCE

WITHOUT COMPROMISE

Optimum transfer, high throughput

of the standard pre-screening and

optional secondary screening unit

and large stockpile volumes of the

full productivity and added value

Our constantly further developed

control system CRUSH CONTROL

product conveyor belts ensure

in operation.

MORE MAN

MORE MACHINE

actively supports your staff

optimises your processes in operation and maintenance.

> ENERGY EFFICIENCY

in all work steps and

DRIVE WITH A FUTURE

Constantly rising fuel costs, stricter environmental regulations, high burdens due to maintenance and repair. It has never made more sense to


change to intelligent hybrid technology in mobile processing!

CRUSHING TECHNOLOGY

SBM crushers combine maximum feed size and high throughput with precisely defined product quality: Benefit from our decades of experience in all areas of crushing technology.

Hybrid Pioneers - since 1980

Benefit from the most sophisticated drive system in the market!

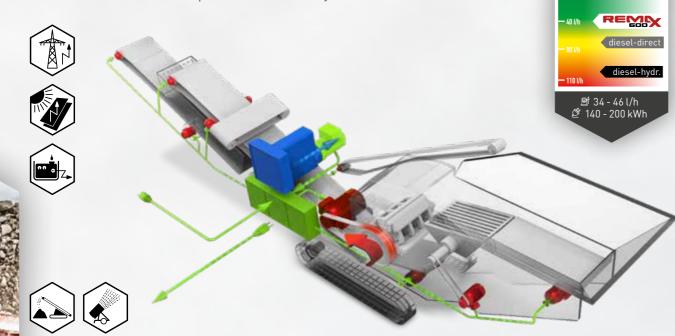

Only SBM consistently relies on the advantages of the **purely** electricaldrive of conveying, crushing and screening components in mobile crushing plants of all power classes.

> In independent diesel operation, a motor/generator unit supplies the energy at low, constant speeds: low-emission, quiet and extremely economical.

All electric drives with their cable and plug-in connections are practically maintenance-free, do not cause any thermal or stand-by losses and decisively reduce environmental risks due to large hydraulic oil volumes.

In optional mains operation, you simply flip a switch, and everything about the plant works as usual - only without diesel. REMAX 600: The benchmark in the 600 t/h class

More output, better quality, greater product variety with just one machine

HARD FACTS	
Inlet opening	1.380 x 1.000 (1.200*) mm
Feed size (max. diagonal space)	0 - 1.000 mm (up to 800 kg p
Feed capacity	max. 600 t/h***
Final grain size	0 - 22 bis 0 - 90 mm

* Inlet cover open

** Iron reinforcement thickness max. 30 mm and protruding from the concrete block max. 200 mm


*** Depending on feed material, feed size and desired final grain size



Get your money off the road!

During the development of the REMAX 600, optimal transportability was at the top of the list of specifications. Despite being unprecedentedly fully equipped, the large SBM plant meets important transport dimensions and thus enables permanently economical site operations with quick changes of location even in large areas of activities. The well thought-out positioning and kinematics of all attachments as well as automated routines of the system control enable tool-free set-up and dismantling in one-man operation - guickly, safely and even under the most adverse conditions. A large ground clearance and good slope angles make the REMAX 600 highly mobile on site: This results in short distances in primary crushing and ensures fast loading cycles in the high-capacity production of up to five final aggregate sizes.

w

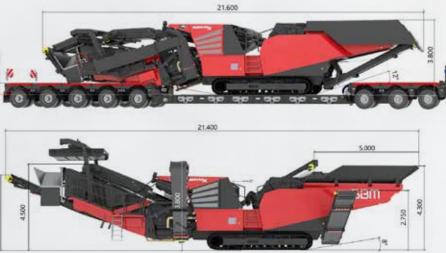



TRANSPORT DIMENSIONS	LENGTH	WIDTH	HEIGHT	WEIGHT*
without secondary screening unit	15.700 mm	3.490 mm	3.800 mm	62.500 kg
with secondary screening unit 1-deck	21.600 mm	3.490 mm	3.800 mm	76.500 kg
with secondary screening unit 2-deck	21.600 mm	3.490 mm	3.800 mm	77.750 kg
with secondary screening unit 3-deck	21.600 mm	3.490 mm	3.800 mm	79.000 kg

DRIVE SYSTEM REMAX 600

Motor	CUMMINS X15*			
Operating speed	4-stage			
Tank capacity Diesel/AdBlue	720 l / 110 l			
Generator	520 kVA			
Electric motor crusher	250 kW (up to 375 kW peak)			
Plug-in grid connection (opt.)	400 V, 520 kVA; 50 - 60 hz			
Plug-out power supply	400 V, 63A			
	* complexity the company			

only with the curren sion regulations





Easy one-piece transport - minimal set-up times -- optimal logistics on site

*total weight including all options



highly wear-resistant

- steel construction
- three-sided, folding walls automatic locking device

DRIVE FRAME AND TRACK RUNNING GEAR

- reinforced and weight-optimised frame structure
- track running gear integrated in the frame
- proportional drive
- speed: max. 1.25 km/h
- climbing ability: 27 %

CRUSHER **DISCHARGE CHUTE**

- width: 1,500 mm
- wear lining made of highly wear-resistant steel
- frequency-convertercontrolled drive with cleaning function

RETURN CONVEYOR

- infinitely adjustable belt speed
- hydraulic swiveling to stockpile
- discharge height: 4,700 mm ■ stockpile capacity up to 200t
- hydraulic folding for transport



1-/2-/3-DECK SECONDARY SCREENING UNIT (OPTION)

- 1-, 2- or 3 deck circular vibratory screenwith twin drive
- screen size 1,800 x 5,500 mm
- fine and medium size conveyors hydr. foldable
- total stockpile volume up to 160 t easy to dismount weight 1-deck: approx. 14,000 kg

weight 2-deck: approx. 15,250 kg weight 3-deck: approx. 16,500 kg

HYBRID ELECTRIFIED

OPTIONS

- single/double/triple wind sifting with frequency converter
- plant mains operation (plug-in)
- single-roll belt weighers (all fractions)
- water spraying at crusher inlet and conveyor discharges

One step further again with SBM

Automated gap adjustment and wear detection for more productivity

The 1400 impact crusher incorporates our decades of experience in electrically driven crushing technology.

With the newly developed automatic gap adjustment, you can now get even more out of the REMAX 600 – quickly and safely during operation

housing made of high tensile steel

HOUSING

- optimised inlet geometry for maximum penetration into the impact range
- hydraulic opening of the inlet flap and the housing simple change of wear parts, inter-
- changeable to ensure optimum utilisation and reduced stockkeeping

IMPACT TOOLS

- 2 independent crushing stages
- fully automatic gap adjustment during operation via plant control or manually via radio command
- simple & easy gap adjustment power transmission system of
- the impact tools high foreign matter compatibility
- due to optimised by-passes massive mono-block system -
- revolvable for maximum utilisation



DRIVE

- electric motor 160 kW (peak load up to 240 kW)
- 4 rotation speeds/ rotor
- circumferential speed: 33-39 m/s belt drive with tensioner

ROTOR WITH IMPACT BARS

- welded and annealed steel structure
- 1400-crusher

without emptying the crusher. At the same time, the wear of the impact

tools and blow bars is continuously monitored. This ensures the hig-

hest quality and full availability of your equipment without time-con-

- 4 impact bars
- simple change of impact bars sideways or upwards
- impact bars revolvable for maximum utilisation

SAFETY


- rotor re-turning device, lockable in all positions
- safe changing of impact bars
- easy removal of blockages key system with monitored
- stand-still of the rotor
- automatic wear detection of impact tools and blow bars reduces the inspection effort and prevents failures

Always the right tools

Original impact bars made by SBM get the best from your crusher

Only impact bars in OEM quality ensure the full performance of your SBM crusher and prevent uncontrollable wear.

Precisely matched to the crushing characteristics of our technology, our originals simply deliver more, longer, and more economically.

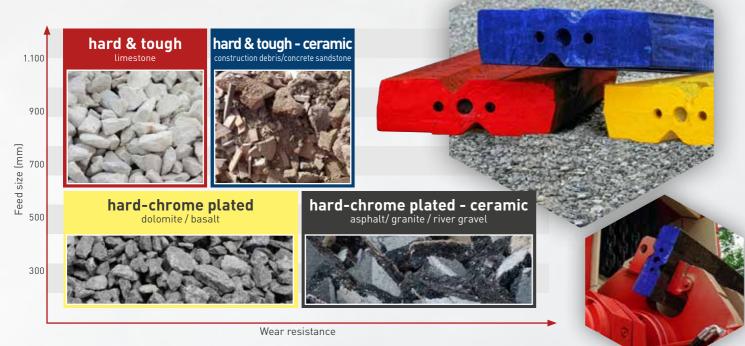

This illustration helps you to choose the optimum impact bars for normal crushing operations For special applications, please contact your SBM partner

Everything under "CRUSH CONTROL"

Up-to-date support in operation and maintenance

Intuitive operability, fast reactions if necessary and significantly reduced workload of machine operators, technicians or dispatchers are the advantages of our control system CRUSH CONTROL with mobile radio-based app solution.

INTUITIVE & SAFE

- simple plant start/stop via classic push buttons
- operator guidance and status display via 10-inch colour display
- quick adjustment of performance parameters via touch screen

OPTIMISED PRODUCTIVITY

- continuous monitoring of all plant functions
- load-dependent crusher feeding via frequency-controlled feed chute
- comfortable and safe one-man operation of the complete plant via multifunctional remote control from excavator/loader

ALWAYS INFORMED

- current location and machine data via personalised app solution
- accessible at any time and from everywhere via the internet ■ individually configurable information on operating data, production output (opt.) and maintenance status of your plant

QUICK SUPPORT

- authorised remote access to machine functions by SBM technicians or SBM customer service
- fast troubleshooting or process optimisation without on-site intervention

The professionals at your side

Comprehensive dealer support for all industries

We are continuously expanding our international dealer network with strong and experienced sales and service partners. Together with our product specialists, they will find the right solution for you and

accompany you throughout the whole life of the plant.

CUSTOMER SERVICE AND SALES

The trained customer consultants of our trade partners will support you in selecting the track-mobile crushing plants best-suited for YOU with the corresponding equipment. They will provide you with information and forecasts on production output as well as investment costs, making your investment transparent and secure in the medium- and long-term range

QUALIFICATION

From machine handover to regular training for your employees - our partners offer a wide range of services for every industry.



suming visual inspections.

THE COMFORT PLUS IN SERIES

■ 10 integrated functions complete plant operation proportional drive control radio link monitoring with emergency shutdown



symbolic phote

Find here the access to our app.



PARTS LOGISTICS

SBM partners provide professional back-up in the quick supply of spare and wear parts, thus ensuring full availability of your key machines.



The WEB shop simplifies vour orders

MAINTENANCE & SERVICE

Whether it is scheduled regular maintenance, a large all-round service or rapid intervention on the construction site - our partners are ready to help: competent, well-prepared and dependable.